

Please Note: Use separate sheet for different colours

Page ____ of ____

Company: _____ Customer Ref: _____

Office Use Only: Order No: _____ Order Date: ____ / ____ / ____ Date Required: ____ / ____ / ____

Order Quote
 Elite 63 Chamfered Elite 70 Sculptured
 With Glass Unglazed
 With Panels No Panels

(METRIC ONLY) VIEWED FROM INSIDE (INTERNALLY GLAZED ONLY)

Frame Colour: _____ Window Handle Colour: _____ Door Handle Colour: _____

Glass Specification (28mm D/G as Standard)

Energy Grade: Float Low E ^{STD} Rating

Glazing: 28mm Double ^{STD} Triple ____mm

Spacer Bar: Bronze ^{STD} Warm Edge Silver

 Customer Signature

Window Specification: (Tick where applicable)

W Hardware: Espag ^{STD} Twincam High Sec Shoot Bolt High Sec

Outer Frame Height: 60mm ^{STD} 70mm

Trickle Vents(TV): No ^{STD} Yes Mark on each window

Window Drip: No ^{STD} 20mm 50mm*

Handles Seperate: Yes

Door Specification: (Tick where applicable)

D Hardware: 4 Roller ^{STD} Hook Lock Anti-Bump Cylinder

Doors Open: In ^{STD} Out

French Door: In Out ^{STD}

French Master: Left Right

Location: _____ Glass Type: _____

1

Width: _____ Height: _____ Qty: _____

Location: _____ Glass Type: _____

2

Width: _____ Height: _____ Qty: _____

Location: _____ Glass Type: _____

3

Width: _____ Height: _____ Qty: _____

Location: _____ Glass Type: _____

4

Width: _____ Height: _____ Qty: _____

Location: _____ Glass Type: _____

5

Width: _____ Height: _____ Qty: _____

Location: _____ Glass Type: _____

6

Width: _____ Height: _____ Qty: _____

Location: _____ Glass Type: _____

7

Width: _____ Height: _____ Qty: _____

Special Instructions / Sundries:


Panel Composite Slab Details (Each)							
Box No	Colour In	Colour Out	Product Code	Glass Design	Backing Glass	Letterbox Colour	Knocker Type

Please Note: All of the following details are taken as standard unless specified by the customer. Manufacturing sizes only - Doors open inward as standard - Standard Drops: 400mm - Standard Width: 600mm - Fire Escape: 650mm - Door Mid Rail: 900mm


HOW TO ORDER AT UCS

GENERAL INFORMATION


Casement Window:- Side opening sash with dummy transom hinged to left. Also with top hung sash with trickle vent in sash.

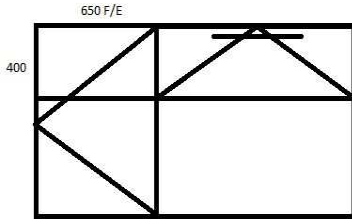

Resi Door with Fanlight and Mid Rail with Letterbox hinged on Right.



Tilt & Turn Window Hinged on Left.



Splits and drops unless stated otherwise are taken as Standard (see overleaf) and also from the edge of the frame to the centre of the mullion/transom. When drawing openings the arrows must point towards the hinged side and must be clearly from corner to corner. (As above). The Manufacturing Size Required Is the size of the frame excluding any ADD-ON, stone cill or Frame Joiner.

MAXIMUM / MINIMUM SIZES - (See UCS website for any variations)

	Top Hung	Side Hung	Doors	S/Lights	Dr & S/Lgts	Dr & 2 SL	F/Door	T&T	VS - HD	2 Pane Patio
Min Width	340	340	700	250	950	1200	1050	500	500	Check
Min Height	340	340	1700	250	Variations	Variations	1850	600	880	Check
Max Width	1200	700 *	1084	3000	Variations	Variations	2094	1500	1300	3000
Max Height	1200	1300 *	2284	3000	Variations	Variations	2284	1500	2400	2400
Max Area	1.44m	0.91m	2.5m	4m				2.1m		

HANDLES, PANEL LETTERBOXES AND KNOCKERS:- COLOURS and TYPE (Other colours on request)

Please USE Colour Description for Handles	Windows		T&T	Doors		Patio	Letterbox	Kocker	
	Cranked	Inline		Lev/Lev	Lev/Pad		Black Surround	Um	Others
White	✓	✓	✓	✓	✓	✓	✓		Scroll and Lions Head knockers, spyholes & numerals also available in limited colours.
Polished Chrome	✓		✓	✓	✓	✓	✓	✓	
Matt Silver (Anodised)	✓			✓	✓		✓		
Polished Gold	✓		✓	✓	✓	✓	✓	✓	
Matt Gold (Anodised)				✓	✓		✓		
Black	✓		✓	✓	✓	✓	✓	✓	

Abbreviation & Symbol Key

TV or	Trickle Vent	$\frac{1}{2}$ or =	Frame Split equal in half	NLK	Non Locking Handle	Please ensure that the Symbols and frame dimnions are written clear and concise so that processing can be completed more accurately. E.G. 7 and 1 don't get misinterpreted.
	Master (Opening Leaf)	$\frac{1}{3}$ or =	Frame Split equal in third	X X	Double Handle	
FRF	Fully Re-inforced Frame	$\frac{1}{4}$ or =	Frame Split equal in four	F/E	Fire Escape Hinge	
	Midrail or 110mm Trans	EQG	Equal Glass Size	EG/H	Easy Clean -90 Hinge	
	Letter Box		Georgian Bar / Lead	ALI-T	Aluminium Threshold	
F/L & DS	Fixed Light & Dummy Sash	OBS	Obscure Glass	LOWPVC-T	Low PVCu Threshold	

Safety Glazing - Key Information on Critrical Safety

Areas of internal & external walls (Glazed Locations) are considered critical in terms of safety and must have safety glass installed are:-
(Guidelines - Crosscheck Current Building Control Publications)

- Between the finished floor level and 1500mm above in doors and side panels, also within 300mm of either edge of any door opening.
- Between the finished floor level and 800mm above that level in the case of walls, partitions and windows.
- All mirrored doors and panels. NB: If any part of a glass area falls within these critcal areas it must meet the requirements in it's entirety and not just relevant section.

IMPORTANT INFORMATION

(ALL VIEWED INSIDE)

Overall Frame sizes must not exceed 6m ² or 3500mm wide in white and 4m ² or 2500mm wide in foils.	Please use separate order forms for different colours.
French Doors:- State Main Opener and IN or OUT. If not ticked, it will be taken as RHS&Open Out	Tilt & Turn:- 70mm Outer Frame. T&T vent width must NOT exceed 1.5 times the height.
When ordering fire escape sashes for new build, the minimum sizes are 650mm wide and 1000mm in height to comply with regulations. Any fire escape ordered below these these sizes will automatically be taken as replacement jobs.	Spectus Windows Hardware:- Double Espag will be fitted to all sashes over 400 wide and 700mm high. Hinges have 17mm stack height, espags 20mm backset and window handles use a 15mm Spindle. *Height of side hung sashes can be increased to 1400mm if the width kept below 650mm.
Door with sidelight cannot be made as one if an aluminium threshold is required and minimum PVCu threshold with door with sidelight is 60mm. Miminum Sidelight with welded Midrail is 400mm. As standard all mullions, midrails and transoms in residential doors are 110mm unless stated. Please specify split spindle when required.	All doors with a fan light will be taken as 2100mm high and remaining height on fan light. 200mm is the smallest a fanlight can be made. A Letter box can only be fitted to a sidelight greater than 450mm.
Please use box at the bottom of the order form for any additional information and accessories.	4 hinges will fitted on doors over 1000mm wide, 2200mm high or triple glazed doors as standard, charges apply. Customer to specify heavy duty hinges on sashes if required.
All load bearding frames, e.g. conservatories or load bearing bays must State fully re-inforced.	Patio Doors - 70mm only and 28mm Glazing
We cannot accept responsibility for any non compliance with the above points.	On Orders please specify quote no. if previously quoted by UCS

QUERIES ON ORDERS WILL HOLD UP DELIVERY, ORDER DATE TAKEN AS WHEN QUERIES ARE RECTIFIED.